


Protecto-Flex 100XT

100% Solids Novolac Epoxy

80 to 90 mil reinforced system with
flexibilized basecoat for crack bridging

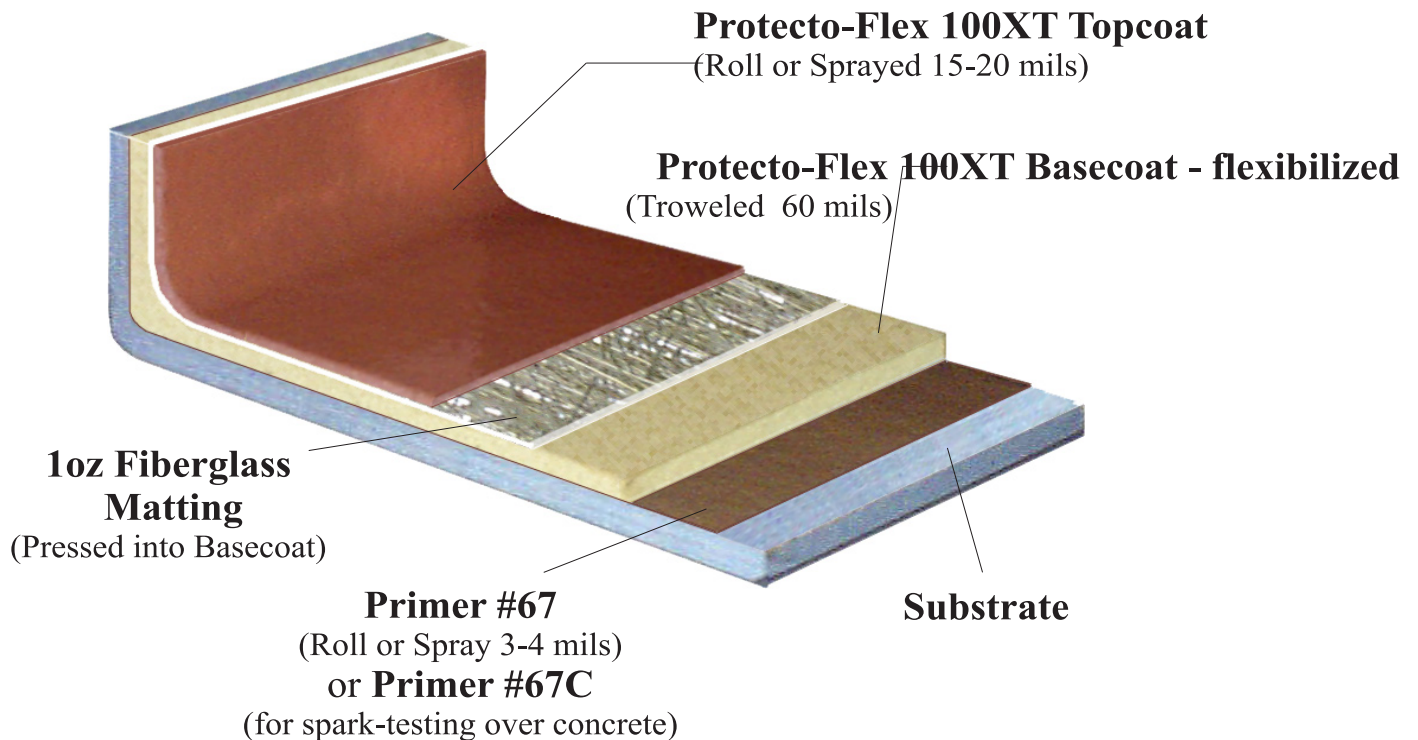

Applications - Crack Bridging

- Secondary Containment Areas
- Concrete Dike Areas
- Concentrated Acid Spills / Solvents
- Floors (splash and spillage)
- Where crack bridging is mandatory