


Protecto-Flex 800

Flexible Epoxy Lining with Vinyl Ester Topcoat

80-90 mil reinforced system with
flexibilized basecoat for crack bridging

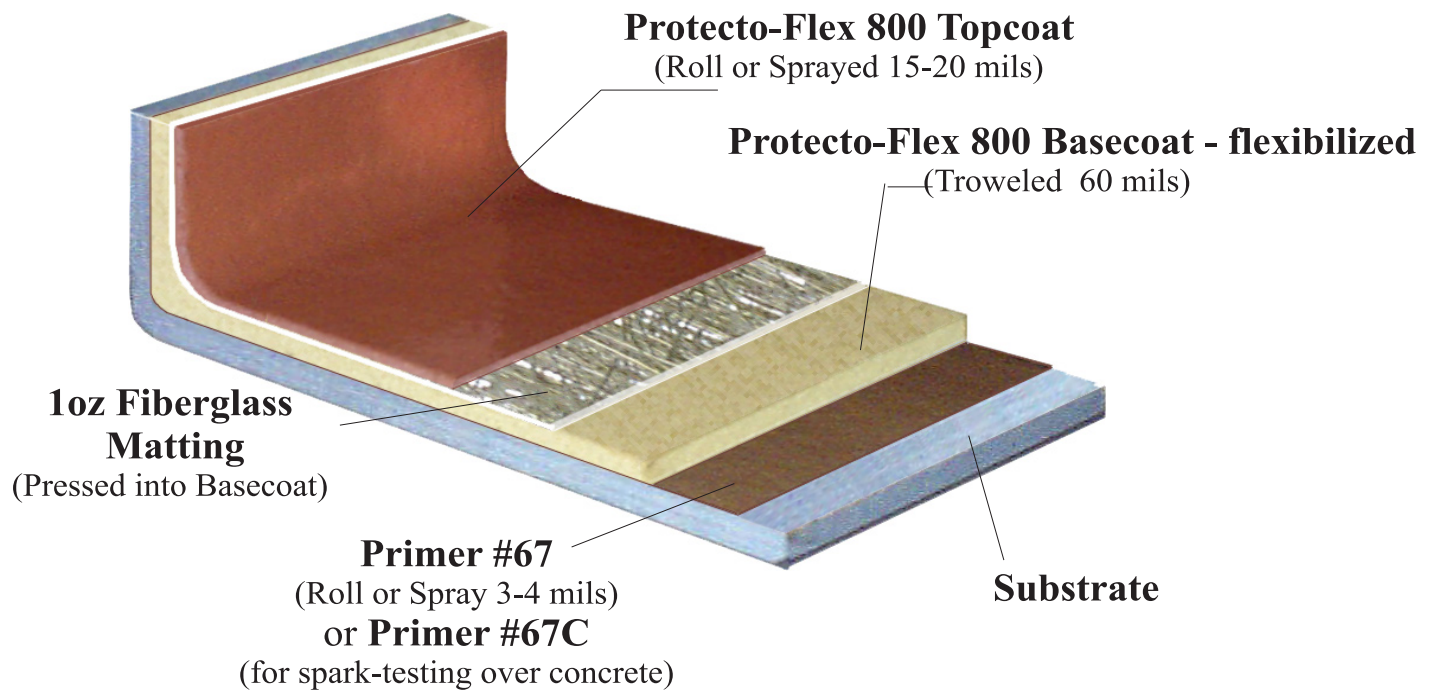

Applications - Crack Bridging

- Secondary Containment Areas
- Laboratories
- Concentrated Acid Spills / Solvents
- Food Processing Floors
- Where crack bridging is mandatory