


Protecto-Flex 905

Flexible Epoxy Lining
with Flake Filled Vinyl Ester Intermediate Coat
and Graphite Filled, Novlac Vinyl Ester Topcoat

100 to 110 mil reinforced system with
flexibilized basecoat for crack bridging

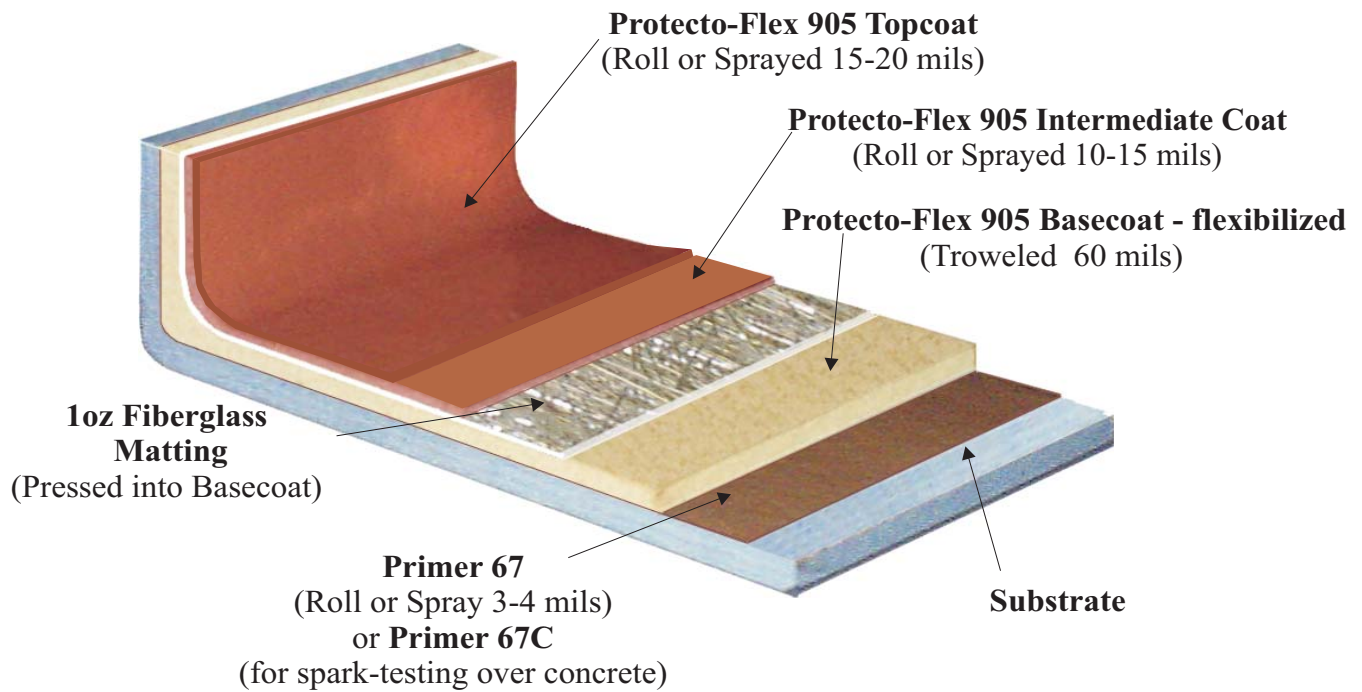

Applications - Crack Bridging

- Secondary Containment Areas
- Laboratories
- Concentrated Acid Spills / Solvents
- Food Processing Floors
- Where crack bridging is mandatory