


Protecto-Crete 140TSF

Novolac Epoxy - Aggregate Broadcast 125 to 250 mils

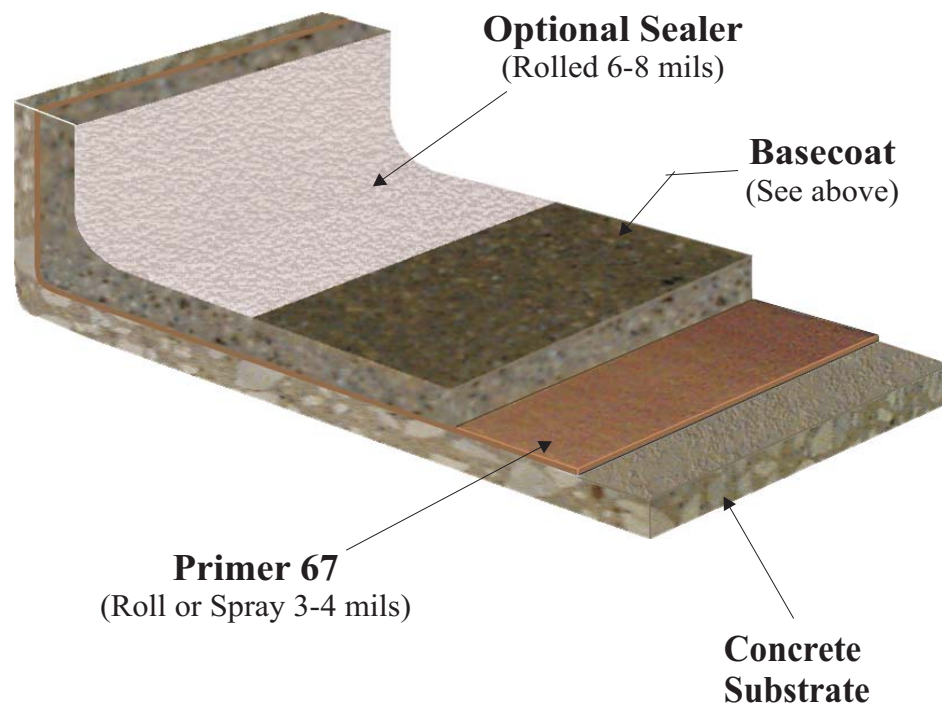

*Broadcast version base coat is applied by gauge rake and broadcast to excess

Applications

- Truck Unloading Platforms
- Pickling Room Floor
- 98% Sulfuric Acid Containment
- Dike Areas
- Aisleways
- Chemical Storage